

KHL-800 Organic Fertilizer Granulator

Payment Term : T/T (30 % of total amount paid when sign the contract as deposit , 70 % value of total amount paid before shipment)

Delivery Time : within 30 days after received 30% deposit .

Warranty period : One Year (not include quickly wear parts)

Update: May.01.2025

Model	KHL-800	
Reference Pictures		
Quantity of Polishers	4-5	6-8
Capacity: kg/h	5000-7000	6000-8000
Type:	Ring die	Ring die
Raw material moisture content %	30-35	30-35
Moisture reduce after granulation processing : %	3-5	3-5
Feed material particle size (mm)	0.3-0.5	0.3-0.5
Pellet. rate: %	>90	>90
Voltage (V)-HZ-P	380/415/440/460V (50/60HZ) 3P	380/415/440/460V (50/60HZ) 3P
Final granule size : mm	3.5-5.5	3.5-5.5
Power: KW	137	182
Weight : Kgs	8500	10000
Outlook Size : m	6.8 *2.5 *2.0	12.3*2.5*2 m
FOB Dalian China (USD)	\$37,200	\$44,000

EXPIRY DATE : Before the end of December, 2025

Address: Team 3, Erlong Shan Village, Bin County, Harbin, China. Zip code 150400

Email : wangyanwen83@outlook.com , Cell Phone : +86-13059015539, www.harbindadi.com

The series of granule machines can make the following raw materials into granules:



The Final granule size: 3.0-5.5 mm

1. Agricultural waste: straw, dregs of beans, cotton dregs, rice bran, etc.
2. Animal manure: a mixture of poultry litter (PL) and animal waste (AW), such as, Slaughterhouse Waste, Fish Market, Urine and dung of cow, Pigs, Sheep, Deer, Chicken, Ducks, Geese, Goat, earthworm cast, etc.
3. Industrial waste: wine lees, vinegar residue, manioc waste, sugar scum, furfural residue, Bean cakes, Vinasse slag, Biogas residue, Fruit residue, palm oil residue, etc.
4. Residues of urban rubbish or sewage treatment plants.
5. Home scrap: food waste, bones, the roots and leaves of vegetables, etc.
6. Turfs, lignite, sludge, pond sludge, Sucrose slag, starch pulp, Bentonite clay, Diatomite.
7. Organic materials mix with mineral materials.

Address: Team 3, Erlong Shan Village, Bin County, Harbin, China. Zip code 150400
Email : wangyanwen83@outlook.com , Cell Phone : +86-13059015539, www.harbindadi.com

Packaging Type

Felt & plastic wrapped, then loaded into 40' feet container

1-Blower& Pelletizer



2-Polishers



4-Power Cabinet



3-Polishers



Address: Team 3, Erlong Shan Village, Bin County, Harbin, China. Zip code 150400
Email : wangyanwen83@outlook.com , Cell Phone : +86-13059015539, www.harbindadi.com

Free supply parts

Maintain Tools



Power Cabinet



Address: Team 3, Erlong Shan Village, Bin County, Harbin, China. Zip code 150400
Email : wangyanwen83@outlook.com , Cell Phone : +86-13059015539, www.harbindadi.com

Machine Appearance



Address: Team 3, Erlong Shan Village, Bin County, Harbin, China. Zip code 150400
Email : wangyanwen83@outlook.com , Cell Phone : +86-13059015539, www.harbindadi.com

Working Principle

造粒部分 PELLETIZER



The raw material goes into the working chamber and fall on the 'dump tray', the raw materials throw into the ring die by centrifugal effect; The ring die and rollers system turning drive-by reduction gears & transmission which energy from the motor.

物料经粉碎、配料、搅拌均匀后，由皮带输送机送入造粒机，经料斗进入工作腔落入甩料盘上，通过甩料盘的离心作用被甩到环模上。

The pressure comes from ring die and rollers system running, cylinder form is forced extrusion from ring die hole, which cut into small pellets as required by cutting line.

电机通过减速机和传动装置驱动环模，和压辊转动，环模与压辊产生的压力使物料被强制挤压通过模孔后形成圆柱状，按要求长度切割成小段后落入罐体中的圆盘上，被高速旋转的转盘向罐壁，沿罐壁作周向运动。



Pellets diameter = Pellets length
圆柱颗粒直径 = 圆柱长度



POLISHER 抛圆部分




The pellets fall onto the disk in the drum, by high-speed rotating disk throw onto the wall of the drum with circumferential movement, the granules in a circular motion at the same time also in radial rotation motion due to centrifugal effect.

由于离心作用，颗粒在圆周运动的同时还作径向旋转运动，通过运动使颗粒之间相互磨擦，将带有棱角的颗粒逐步整型至球型。

Mutual friction makes the granules with edges and corners into balls gradually due to granules' moving. At this moment, ball pellets gradually floating on the top, final granules overflow along with the number of granules increased in the drum.

此球形颗粒逐渐上浮，随着罐内颗粒物料的增加溢流出机外。

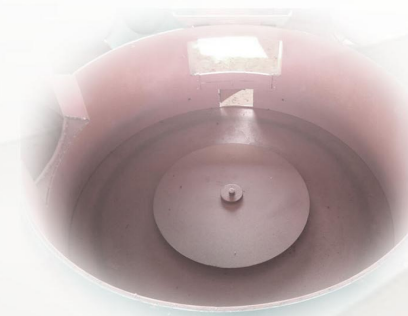

Granules diameter 颗粒直径：
3.0 mm
3.5 mm
4.0 mm
4.5 mm
5.0 mm
5.5 mm

